

PARAGON SMART LED DOWNLIGHT'S



imagine

connected smart home

**LIGHT
SOURCE
SOLUTIONS**



Distributor
GE Lighting



imagine

connected smart home

COLOURS + WHITES

PARAGON Smart LED Downlight




13239L
GE imagine
PARAGON colours + whites
800LM Downlight white
IC-4/IC-F
works with Hey Google



13240L
GE imagine
PARAGON colours + whites
800LM Downlight black
IC-4/IC-F
works with Hey Google

SKU: 13239L, GE IMAGINE PARAGON COLOURS + WHITES DOWNLIGHT WHITE IC-4/IC-F
SKU: 13240L, GE IMAGINE PARAGON COLOURS + WHITES DOWNLIGHT BLACK IC-4/IC-F

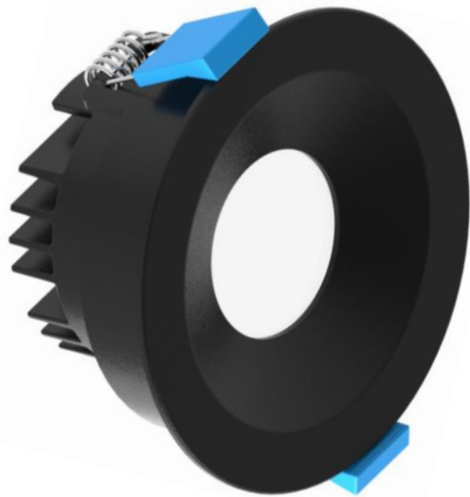

LED Downlight

BRIGHTNESS 800 LUMENS
ENERGY USED 9 WATTS

BASE TYPE
INSTALLED WIRED 1.2M FLEX
& 2-PIN PLUG

LED DRIVER
INSTALLED WIRED REMOTE
LED DRIVER

COLOUR TEMP RGB + CCT
LIFE 15,000 HOURS
WARRANTY 1 YEAR
DIMMABLE APP OR VOICE
SHAPE DOWNLIGHT
IP RATING IP44
APP GOOGLE HOME

No hub required



Seamless Setup

- 1 Plug in your Google Nest device
- 2 In the same room, turn on the light. Installation by a licensed electrician is required
- 3 Download the Google Home App and follow the prompts to easily set up your smart bulb



Requirements:

- Free Google Home app and an active Google Account.
- Working internet connection over Wi-Fi.
- One of the following compatible assistive devices: Google Home, Google Home Mini, Nest Mini, Nest Hub Max, Nest Hub, Google Home Max, Nest WiFi, Nest Point.
- Full list available at g.co/nest/assistivedevice



imagine
connected smart home

**LIGHT
SOURCE
SOLUTIONS**




DIMENSIONS & WEIGHT



7. Mechanical parameters

sketch

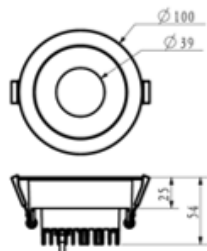

7.1. Dimension standard

D=100±2mm

H=54±1mm

7.2. Weight (g)


370±5%

7.3. Lamp color

White or Black

7.4. Housing material

ADC12

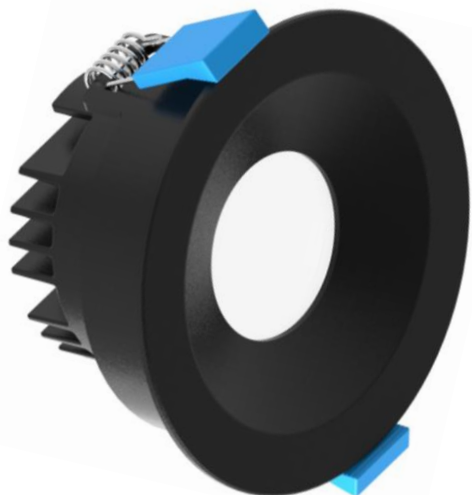

imagine
connected smart home

**LIGHT
SOURCE
SOLUTIONS**



Distributor
GE Lighting



Nest



Connectivity

Wireless

802.11b/g/n/ac (2.4 GHz/5 GHz) Wi-Fi

Bluetooth® 5.0

Chromecast built-in

Dimensions & weight

Dimensions

Diameter: 98 mm

Height: 42 mm

Power cable: 1.5 m

Weight

Device: 181 g

Speakers and mics

Speakers

Google Assistant built-in

360-degree sound with 40 mm driver

Mics

3 far-field microphones

Voice Match technology

Supported operating systems for the Google Home app

Android • iOS²

Power and ports

Power

15 W power adaptor

Ports

DC power jack

Processor

Quad-core 64-bit ARM CPU 1.4 GHz

High-performance ML hardware engine

Sensors

Capacitive touch controls

3 far-field microphones



**LIGHT
SOURCE
SOLUTIONS**



Distributor
GE Lighting

Light Source Solutions Australia Ltd

34-36 Adderley Street East, Lidcombe

New South Wales 2141, Australia

Telephone: 1300 762 852

Light Source Solutions New Zealand Ltd

Level 1, 130 St. Georges Bay Road, Parnell

Auckland 1052, New Zealand

Telephone: 0800 334 352